

High-performance fire rated sealing tape

Trestard[®] 420 black FR

SIGA
1966

for air- and weathertight, UV stable
window connections

for outdoor & indoor



Window sealing
Indoor/Outdoor



Interface sealing
Sheathing board to concrete

FIRE RATED
B-s1,d0



Joint sealing
Sheathing to sheathing board




Penetrations
Cable/Pipe to sheathing board



- ✓ high strength full surface adhesive
immediately 100% tight
- ✓ fire rated
safe
- ✓ flexible and robust
fast and easy to use

Trestard installation

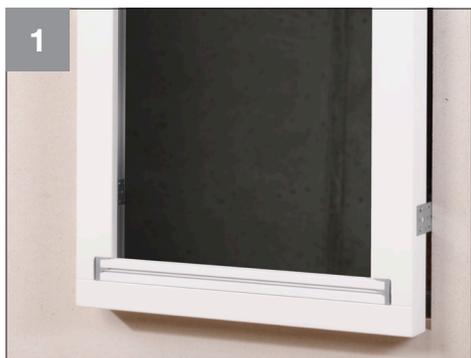

- Window installed on the outside surface



- Cut with sufficient overhang
- Remove the first narrow backing strip and stick it to the edge of the window frame




- Remove remaining backing strip
- Align and fix free from tension



- Cut into the excess, bisecting the angle, and press on



- Repeat the previous steps for the jambs and the head of the window
- Focus on using the separate applicator strips for a neat application along the window frame. Stick neatly in the corner and form a continuous bond to the substrates

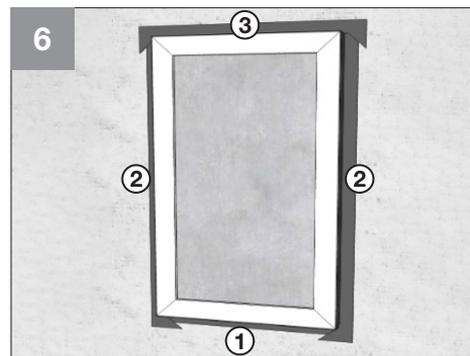

How it should look:

- For a reliable installation, start at the bottom
- The top layer must sufficiently cover the bottom layer

SIGA recommends minimum adhesive widths of 50 mm on the facade and 15 mm on the window frame

if the requirements for reliable bonding are not fulfilled: The substrate must be dry, uninterrupted, even, capable to bear loads, free of dust and grease and must not repel adhesives. Clean substrate before bonding and perform adhesion test on site. If necessary, strengthen with high-performance primer Dockskin 100 / Dockskin 200. **Caution! The bonds must not be under standing water.** Creases or tensions in the membranes / tape must be relieved by cutting and resealed.

Order form

Product	Dimension	Packaged unit	Order volume
Trestard [®] 420 black FR 150 mm 1012-015025	150 mm × 25 m	4 rolls/box	<input type="text"/> Boxes
Trestard [®] 420 black FR 200 mm 1012-020025	200 mm × 25 m	2 rolls/box	<input type="text"/> Boxes
Trestard [®] 420 black FR 250 mm 1012-025025	250 mm × 25 m	2 rolls/box	<input type="text"/> Boxes
Trestard [®] 420 black FR 300 mm 1012-030025	300 mm × 25 m	2 rolls/box	<input type="text"/> Boxes

Company: _____

Street: _____

Customer no.: _____

Postcode/city: _____

Contact: _____

Commission: _____

Email: _____

Date/signature: _____

Goods received

The goods remain the property of SIGA until payment in full.

via e-mail to: order@sigaswiss.com